

Introducing



Mud Mats

A NEW revolutionary product to keep you out of the mud!



Ph (800) 452-4435
Fax (615) 822-9460
info@jenhill.com
www.jenhill.com



EASY TO DEPLOY



**ALTERNATIVE TO
ROCK ENTRANCES**




PROTECTING TURF



SITE ACCESS



Ph (800) 452-4435
Fax (615) 822-9460
info@jenhill.com
www.jenhill.com

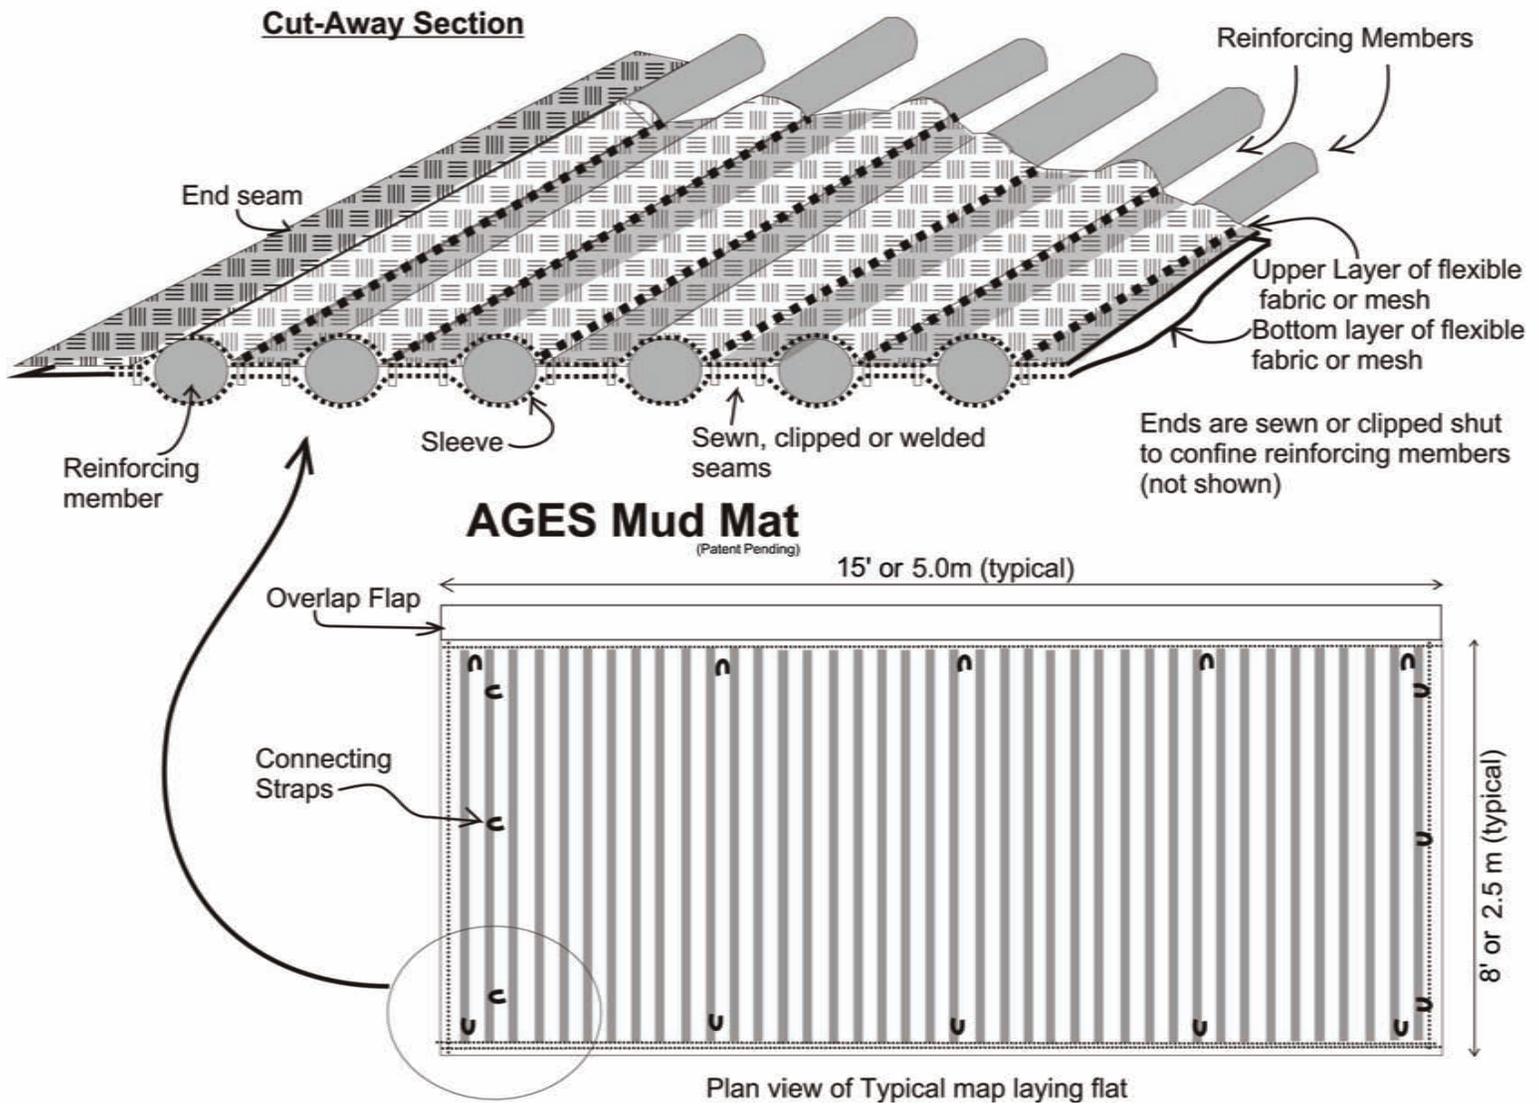

AGES Mud Mat Specifications

PROPERTY	TEST PROCEDURE	VALUE
Grab Tensile Strength	ASTM D4632	802.6 lbs.
Apparent Breaking Elongation	ASTM D4632	25% / 18%
Trapezoid Tearing Strength	ASTM D4533	607 lbs.
Puncture Resistance	ASTM D4833	374.3 lbs.
Mullen Burst	ASTM D3786	456.88 psi
Apparent Opening Size	ASTM D4751	70 US Sieve / 0.212mm
Constant Head Permittivity	ASTM D4491	20.16 g/m ²
Wide Width Tensile	ASTM D4595	685.7 lbs./in.
Material	Woven Geotextile	100% Polypropylene

APPROXIMATE DIMENSIONS PER MAT	
Size Deployed (approx.)	15' x 8'
Shipping Size (rolled)	1.5' dia. x 8.5' long and
Weight	75 - 90 lbs

5 – carabineer clips for each mat (Side connection and end connection straps)



Ph (800) 452-4435
 Fax (615) 822-9460
 info@jenhill.com
 www.jenhill.com