




Mfg by

Applied Polymer Systems

PM (Dry Silt Stop Form)

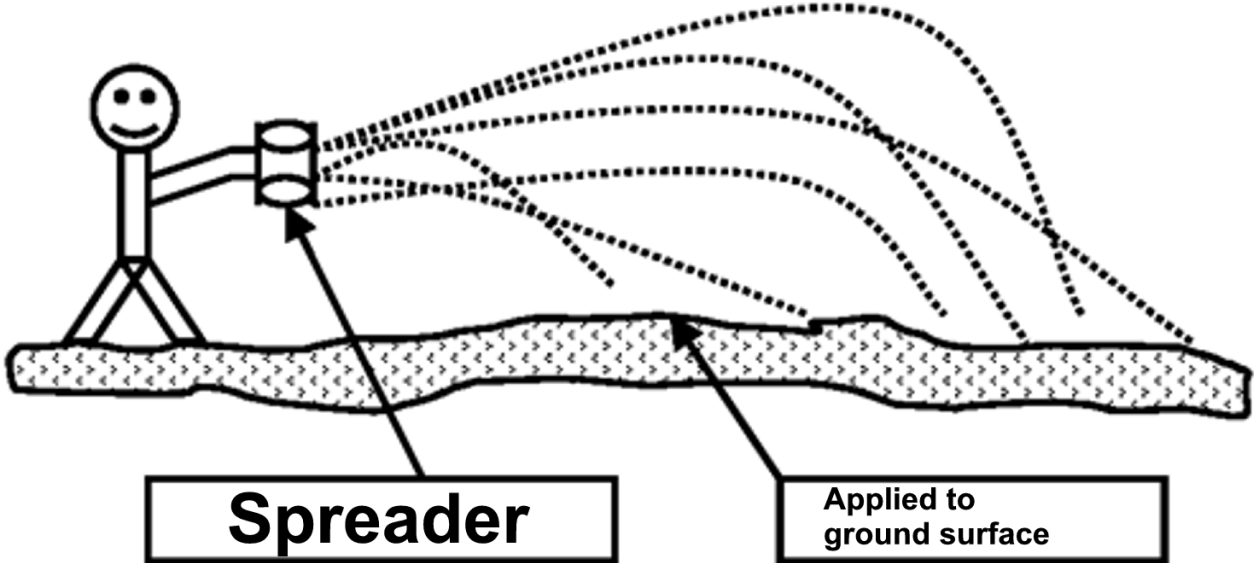

NOTES

1. Dry Silt Stop shall be applied to any exposed soils
2. Dry Silt Stop shall be covered with straw, mulch, matting, or jute
3. Application Rate 10#/acre not to exceed 25 # /acre

12.4