




Ph (800) 452-4435 Fax (615) 822-9460 info@jenhill.com www.jenhill.com

OIL-WATER SEPARATOR

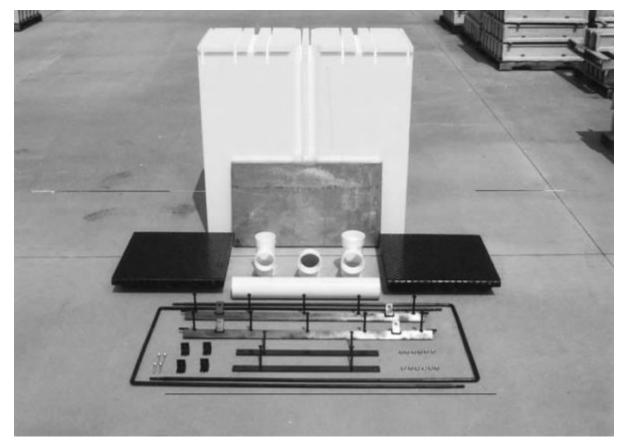

CUSTOM OIL WATER SEPARATOR – TRENCH FORMER®

Some separation requirements extend beyond the capabilities of the standard Trench Former Oil Water Separator. We can provide a number of options to accommodate specific needs. The following modifications and accessories are available:

- 25 mil reinforced geomembrane containment barrier
- Special capacities and dimensions
- Internal oil storage
- Multiple and diffuser baffles
- Second liner allowing for additional leak detection

EASY INSTALLATION – TRENCH FORMER®





Ph (800) 452-4435 Fax (615) 822-9460 info@jenhill.com www.jenhill.com



The Oil Water Separator, by ABT


Inc., unlike other separators, is a light-weight, easily installed forming system. Using our patented, non-floating formwork, the Oil Water Separator installs without the necessity of heavy equipment. It provides a cost-effective system of unequaled efficiency.

Categories: Environmental Products, Storm Water Filtration

Oil-Water Separator - Product Data

STANDARD FEATURES

Three storage capacities – 160, 240, and 320 gallon

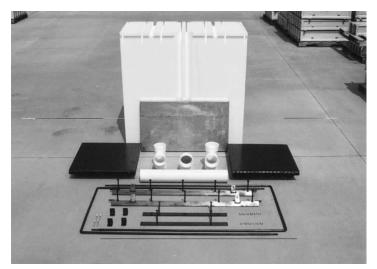

- Three flow capacities 21, 31, and 41 gallons per minute
- Full perimeter steel anchor frame
- Patented no-float installation legs
- Internal PVC piping and fittings
- Preformed deforming grooves
- Full width overflow weir to maintain laminar fluid flow
- Ability to inspect discharge stream





System Specifications

Part Number	Storage Capacity	API Design Capacity	Dimensions (W*D*L)	l/O Invert	Installation Wt w/o Cover	Shipping Weight	Detail Sheet
	gal (ltr)	gpm (lpm)	in.	in. (mm)	lbs (kg)	lbs (kg)	(.pdf)
S160	160 (600)	21 (79)	23 x 48 x 48	12" (305)	75 (34)	235 (107)	POF Adobe
S240	240 (900)	31 (119)	23 x 48 x 72	12" (305)	115 (52)	310 (141)	POP
S320	320 (1200)	41 (158)	23 x 48 x 96	12" (305)	150 (68)	390 (177)	PDF